


<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

DUCATI Fender Eliminator Kit Panigale V4

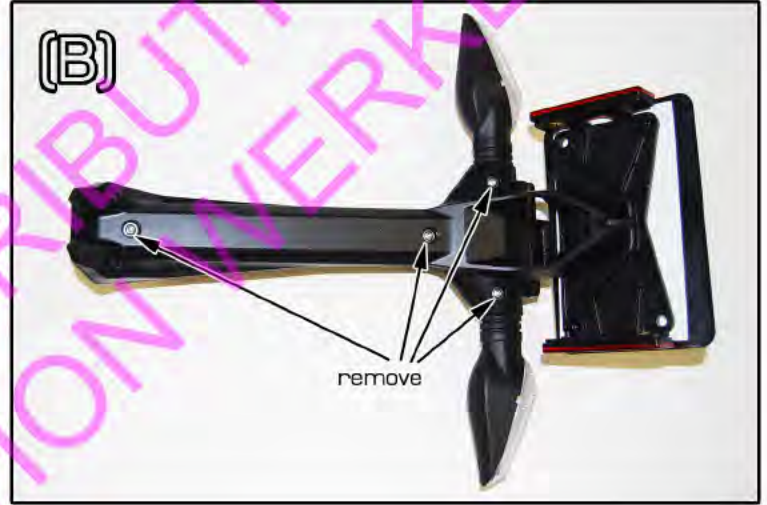

- REMOVAL:
- 1) Remove rear fender (2- bolts, push forward, pull down, and unplug). *FIG (A)
 - 2) Remove cove from underside of fender (4- bolts) *FIG (B)
 - 3) Remove wiring pigtail from inside of rear fender (3- connectors, 1- zip-tie).

WIRE COLORS:

Ground:
Black

Left Turn:
White/Black

Right Turn:
White/Green

License Light:
Yellow

- 1- Main Assembly
- 1- License Light
- 2- (1 hole) Signal Brackets
- 2- (2 hole) Signal Brackets
- 1- 7/16" Plug
- 1- Medium Grommet
- 6- Splice Connectors
- 6- Butt Connectors
- 6- Spade Connectors
- 2- Notched Washers
- 2- 6x10 Allen Bolts
- 2- 6x12 Allen Bolts
- 4- 6m Nuts
- 6- Washers

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

DUCATI Panigale V4 Fender Eliminator Kit

(C)

STOCK SIGNALS



(D)

AFTERMARKET SIGNALS



- ASSEMBLY:
- 1) Adhere License light to Main Assembly.
 - 2) Mount license plate to Main Assembly (2- 6x10 allen bolts in lower holes).
 - 3) Mount signals to Signal brackets. See *FIG's (C) or (D).
 - 4) Secure Signal Brackets with 2- 6x12 allen bolts in upper holes. *FIG (E)
 - 5) Reinstall wiring pigtail to bike. Connect lighting. (use butt connectors for license light)
 - 6) Secure Main Assembly to bike using 2- 6x12 allen bolts.

*NOTE extra connectors are supplied for aftermarket signals.

(E)

