

Part Number: K-ZX636-6-F, K-ZX636-6-R &
K-ZX636-6-SMUG with PAD



Description: Front Saddle, Pillion Pad & Smuggler

Fitment: 2006 Kawasaki Ninja ZX 636


Revision: 1

Tools	Parts List
4mm Allen wrench for stock bolt	1 K-ZX636-6-F
	1 K-ZX636-6-R
	1 K-ZX636-6-SMUG with PAD

1. Remove your stock seat. Refer to your owner's manual if necessary.
2. Saddle mounts just like stock, using your stock bolts. Simply slip the nylon pin into the rear chassis (*Figure 1*), align the front brackets and secure using your stock bolts. (*Figure 2*)
3. To install the pillion or smuggler, slide the rear bracket into the tail section, align the front bracket over the stock key lock system and push down until you hear one click. (*Figure 3*)

NOTE: Brackets can be adjusted to get the best fit.

4. To remove the pillion seat and/or your smuggler, just turn the ignition key on the lower left side of the bike to release the lock.

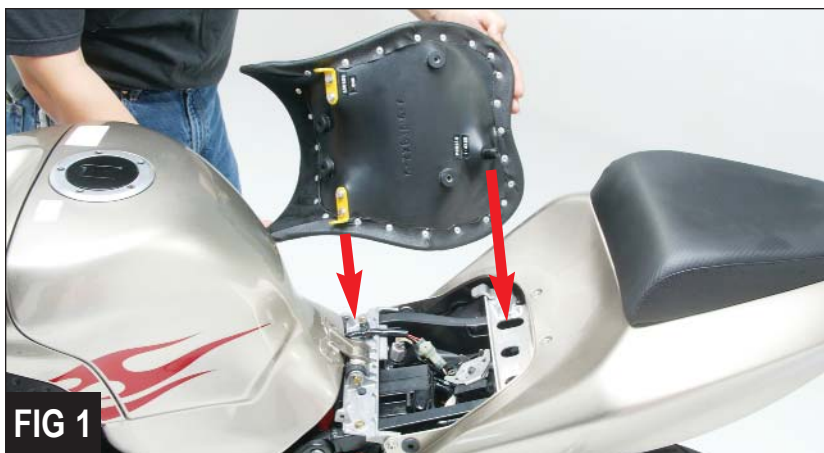

Questions? Give us a holler...
800-223-4332
tech@corbin.com