



EVOTECH®
P E R F O R M A N C E

www.evotech-performance.com

Suzuki GSX-S 1000 GT
Crash Protection




- Ⓐ 1 x M10 x 125mm x 1.25mm (R/H Bolt)
- Ⓑ 1 x M10 x 115mm x 1.25mm (L/H Bolt)
- Ⓒ 2 x M10 Washer
- Ⓓ 2 x Spacer
- Ⓔ 2 x Polyurathane Washer
- Ⓕ 2 x Large Bobbin Head


EVOTECH[®]
P E R F O R M A N C E




Repeat
Both Sides

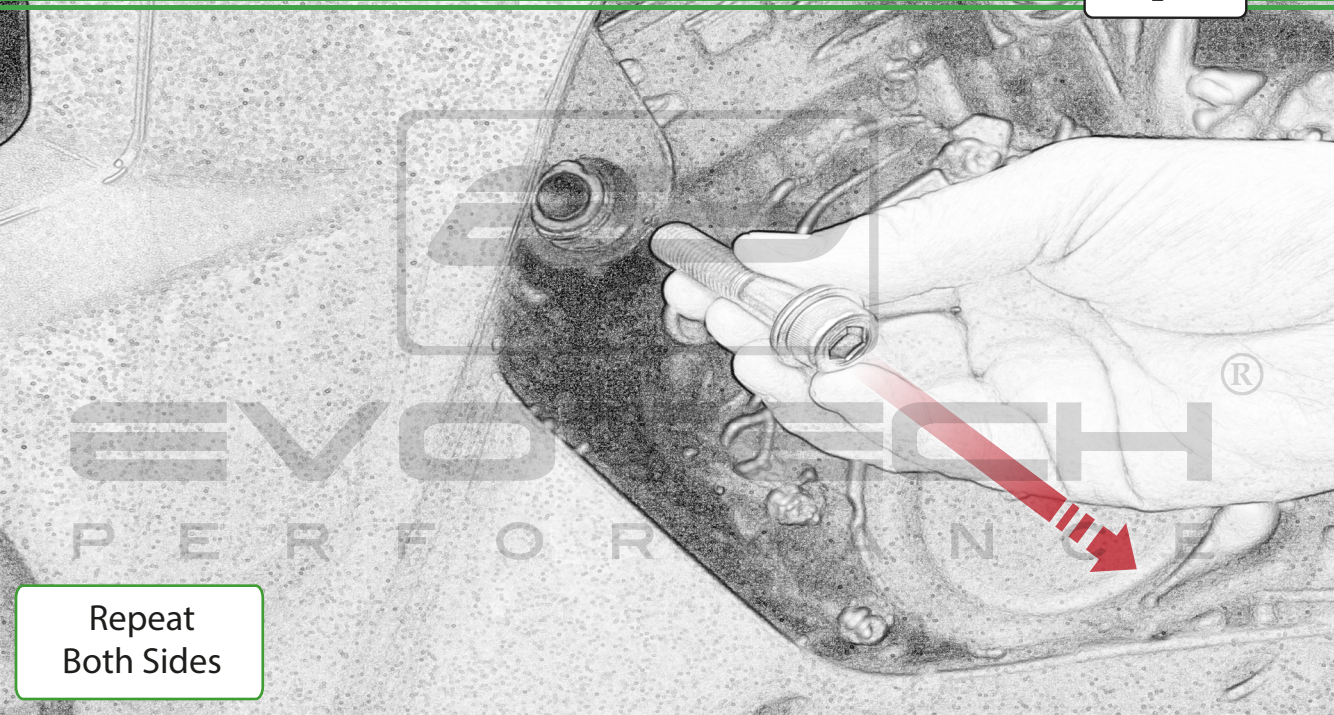


Repeat
Both Sides

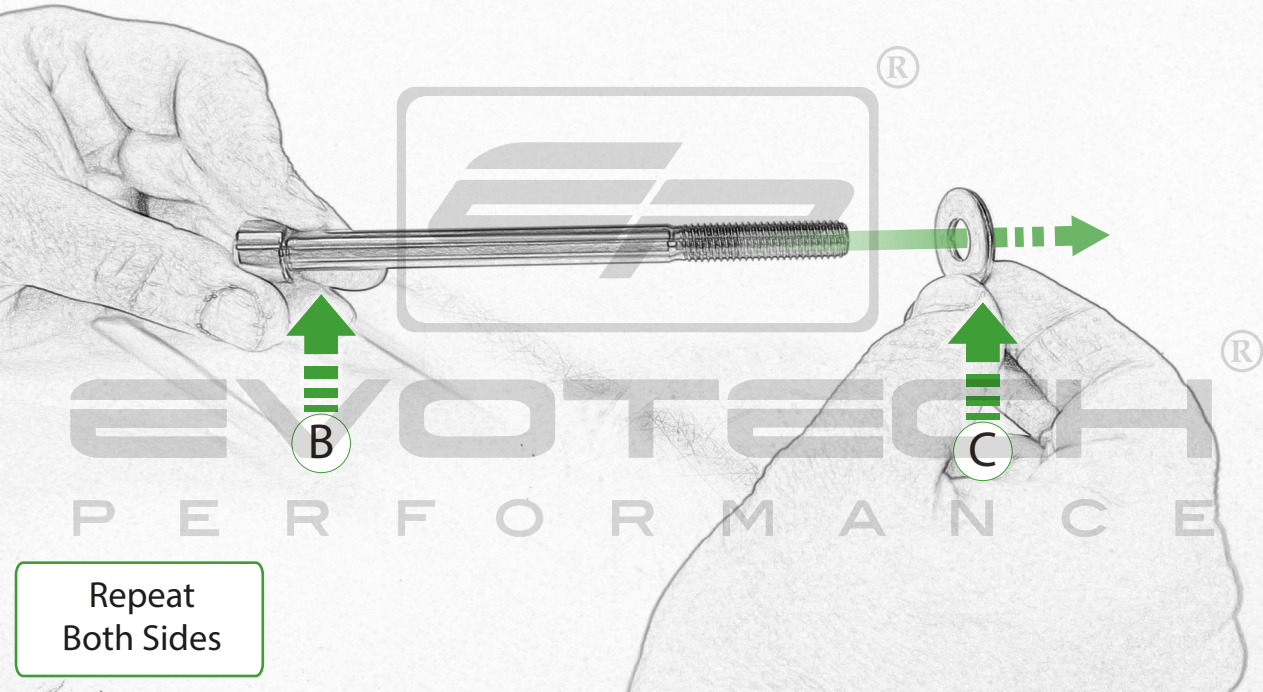


Repeat
Both Sides

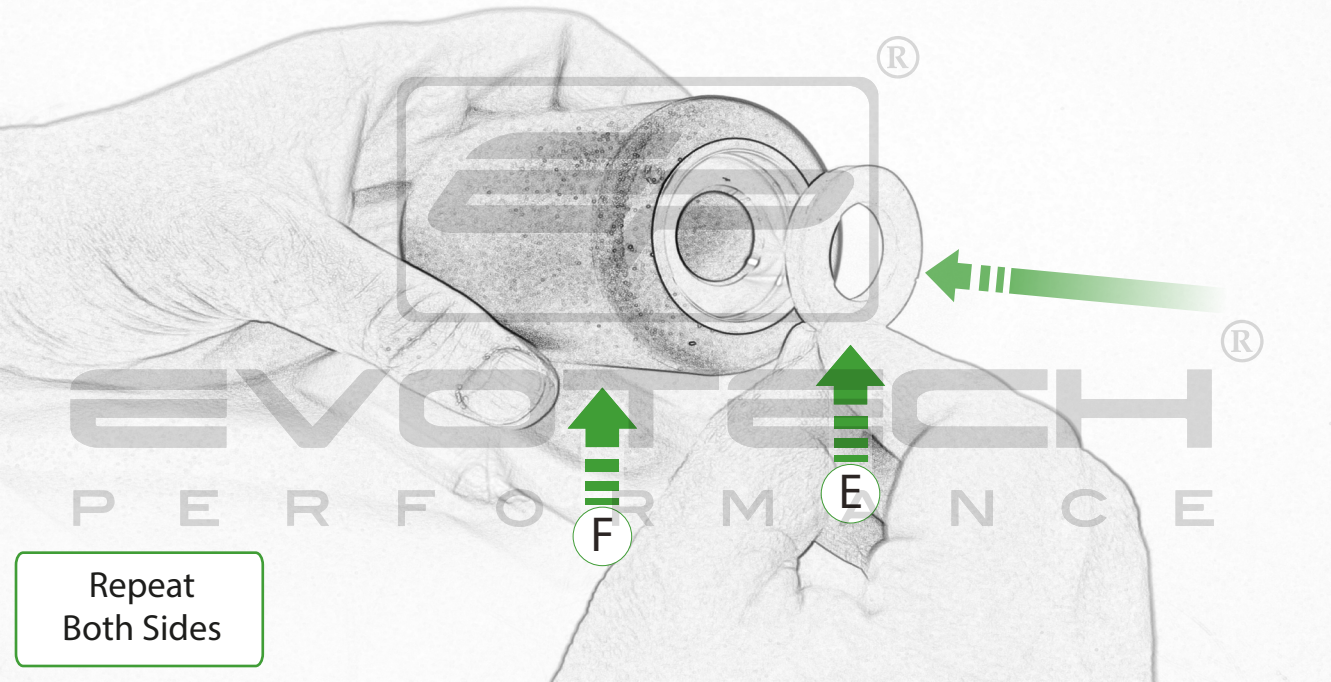

Repeat
Both Sides

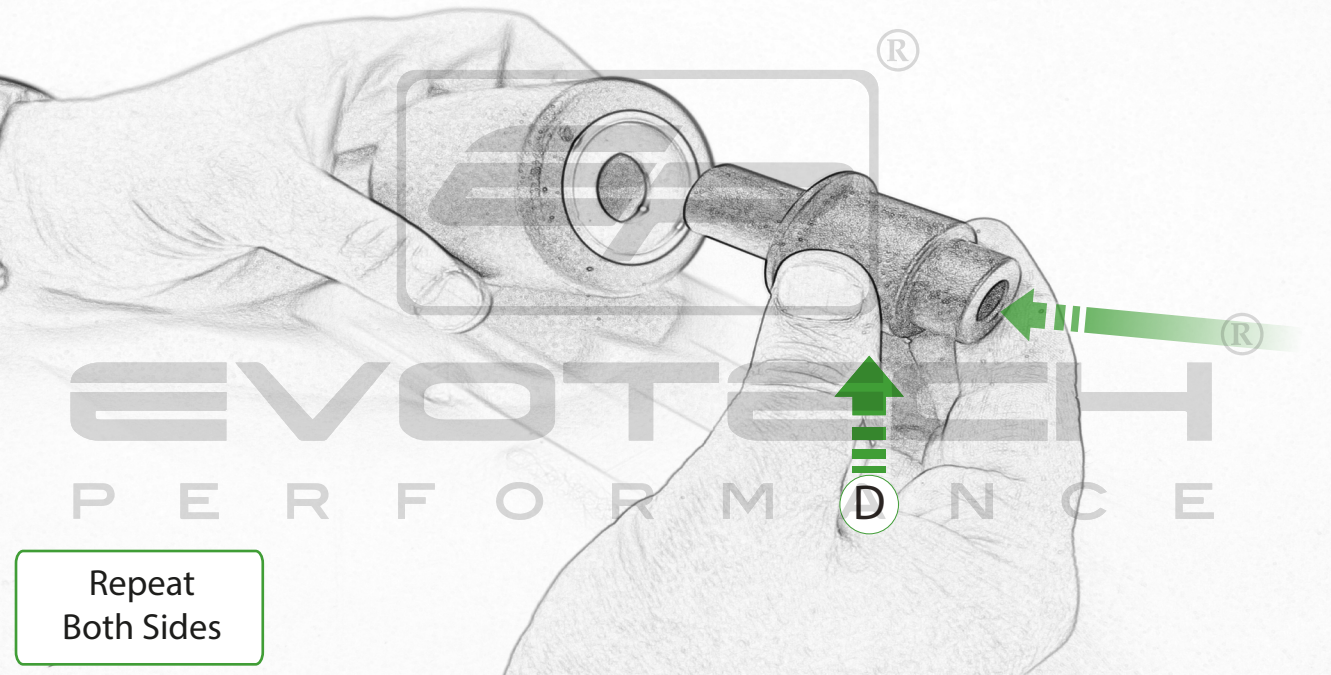


Repeat
Both Sides

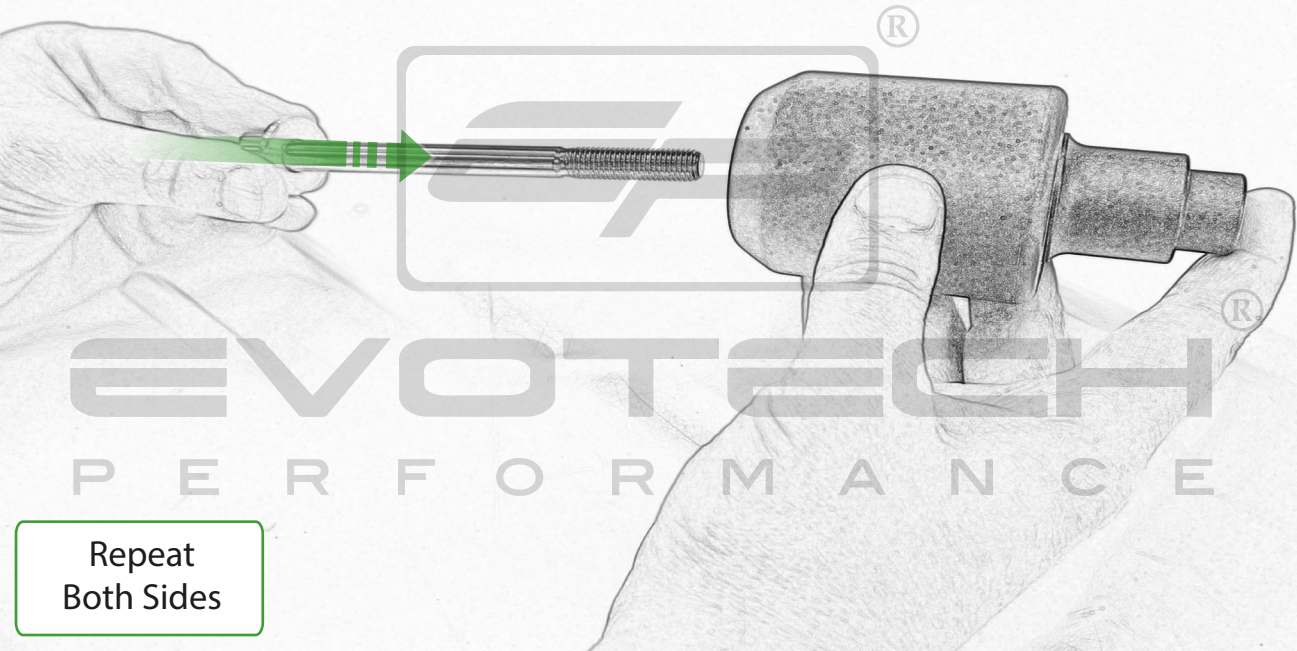

Repeat
Both Sides



Repeat
Both Sides

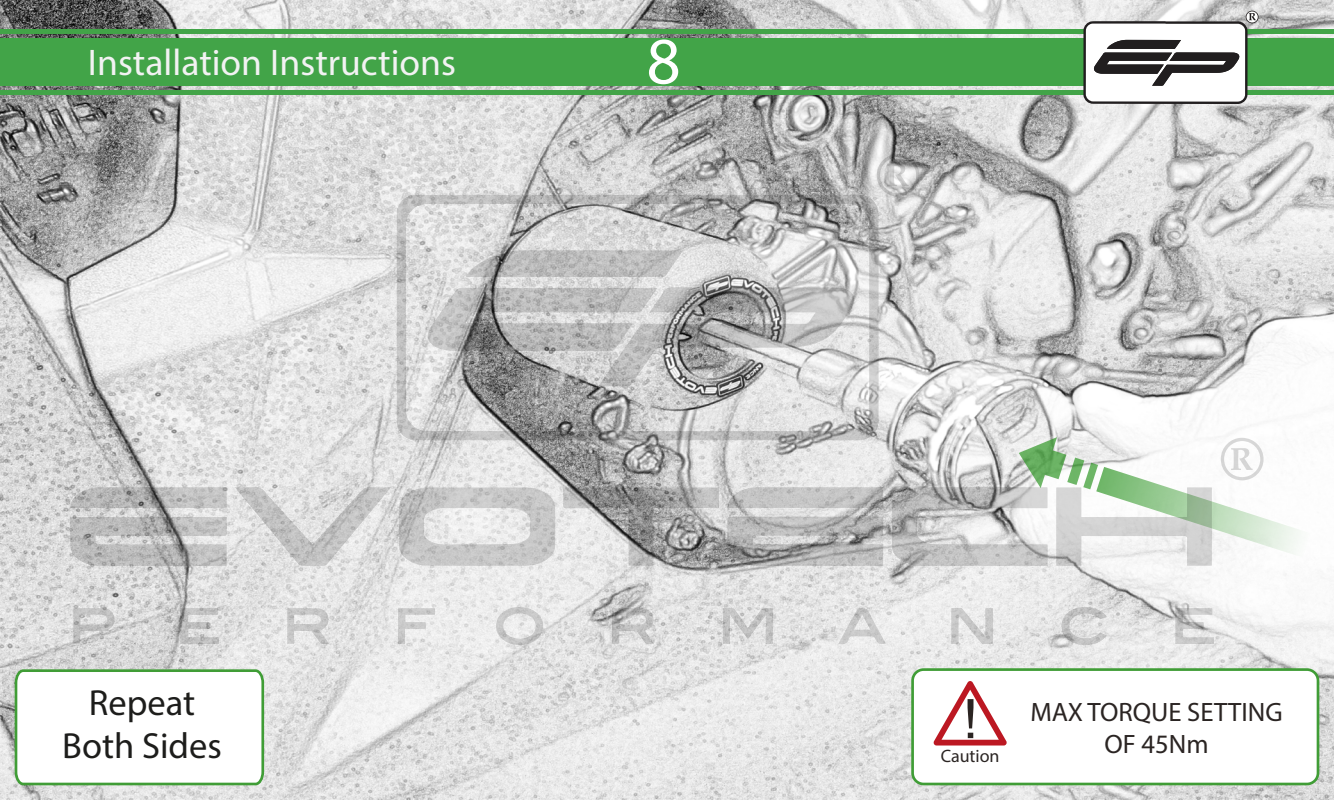

Repeat
Both Sides




MAX TORQUE SETTING
OF 45Nm



ESSENTIAL CHECKS

It is recommended that periodic inspections are made to ensure that all bolts are tightened to the specified torque settings.

Should the bike be involved in an accident a thorough inspection should be made and any components that have taken an impact, no matter how small, be replaced

EVOTECH 
P E R F O R M A N C E



EVOTECH®
P E R F O R M A N C E

www.evotech-performance.com