



MOUNTING SUGGESTIONS:

Ducati Scrambler 2015-2018 One-piece Seat

Hardware: *none*

Tools needed: Ignition key

Removal of Stock Seat:

1. Insert the ignition key into the lock under the left side of the rear fender and turn clockwise to release the rear latch.




2. Lift the seat up and back to remove it from the motorcycle.



Installation of Mustang Seat:

Note: Before installing the Mustang seat, ensure the rubber cover is over the positive battery terminal and the battery cover is properly installed and in place. **Do not attempt to install the seat if these covers are missing, damaged or removed.**

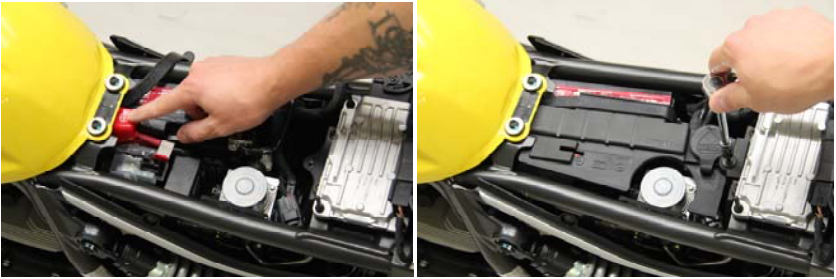

1. Transfer the tool kit from the stock seat to the Mustang seat.



2. Insert the front tab of the Mustang seat into the mount behind the fuel tank.



3. Lower the seat onto the rear fender, align the pin with the latch on the fender, and press down firmly until a click is heard, signifying the seat is latched. Ensure this connection is secure before riding the motorcycle.

Enjoy the comfort and custom look of your new Mustang seat!



These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Refers to part number: 75027

You are cordially invited to
— Tour the Mustang Factory —

See how our craftspeople take pride in transforming raw materials into the world's highest quality, most comfortable handcrafted seats. Please contact Mustang for more information regarding tours of our historic Three Rivers, Massachusetts, facility (only 75 miles west of Boston; 150 miles northeast of New York City). Our two hour tours are by reservation only; we can accommodate groups from 2 to 24. We promise you will ride away with an entirely new awareness of what you put between you and your bike.

