




# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### KAWASAKI NINJA 400

#### FENDER ELIMINATOR

- 1 Remove seat.
- 2 Remove (4) 5mm allen bolts. (Picture 1)
- 3 Unplug (3) stock connectors and slide off stock tail section.
- 4 Remove top plate from lens bracket. (Picture 2)
- 5 Mount NRC license plate to lens bracket with (2) M6x12 bolts and (2) M6 nylon nuts. (Picture 3/4)
- 6 Feed wires through previously removed top bracket and slide into place. (Picture 5)
- 7 Mount NRC kit onto bike with (4) M6x16 bolts and (4) M6 flange nuts. (Picture 6/7)

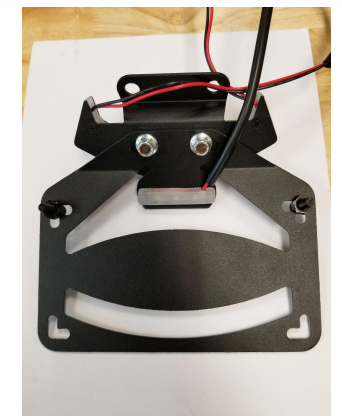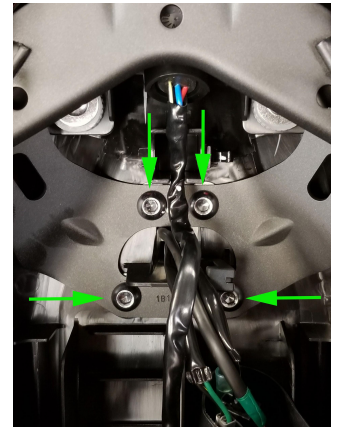

# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR

8 Plug in connectors and test turn signals and plate light.

9 If load equalizer was ordered to stabilize flash speed, use blue t tap connectors to install. Wire colors are on bag.

