


NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

DUCATI SCRAMBLER

DESERT SLED FENDER ELIMINATOR

- 1 Remove seat from bike
- 2 Remove (4) bolts holding splash shield underneath fender with 4mm allen key or socket (picture 1)
- 3 Remove lens from stock signals and unplug spade connectors (picture 2)
- 4 On right side of bike, find white plate light connector and unplug (picture 3)
- 5 To remove stock license plate bracket, remove (4) bolts. The two lower bolts are 4mm, and the two upper bolts are 6mm (picture 4/5)
- 6 Remove 3mm allen bolt under bracket and remove entire license plate bracket (picture 6)
- 7 Remove clips off license plate bracket and mount onto NRC brackets (pictures 7/8)
- 8 Take new turn signal bracket and plug connectors together
 - Black wire on bike to black NRC wire
 - White wire on bike to red NRC wire
- 9 Shrink tube to seal connections (picture 9)

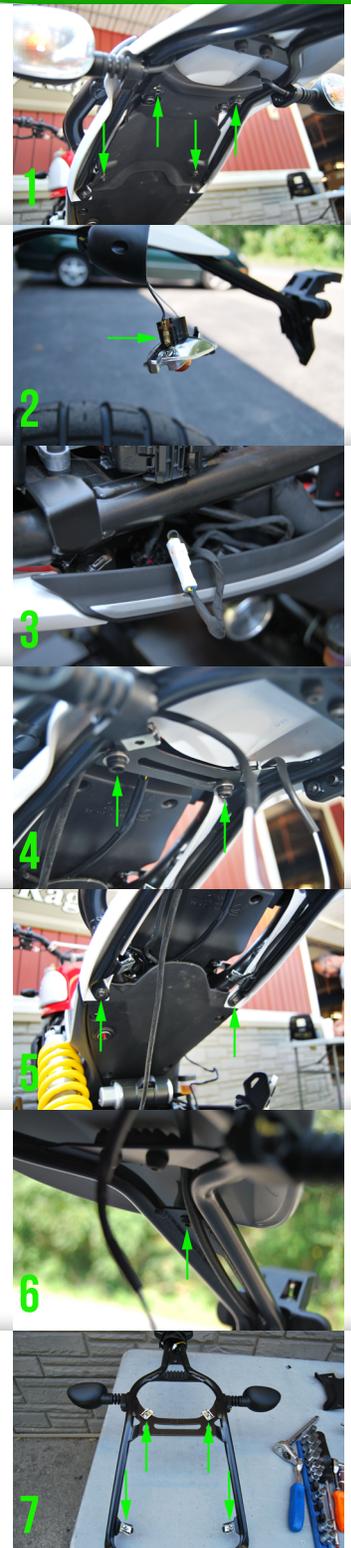

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

DESERT SLED FENDER ELIMINATOR

- 10 With (2) stock 6mm bolts, mount NRC turn signal bracket (picture 10)
- 11 Slide extra wire up underneath bike
- 12 Take 'L' shaped bracket and mount onto stock splash guard; leaving bolts very loose (picture 11)
- 13 Take (4) stock 4mm bolts and lightly thread in splash shield, again leaving everything loose (picture 12/13)
- 14 Once all bolts are started, you may then tighten everything down
- 15 To mount new license plate bracket, remove lower M6 bolts and sandwich license plate between splash shield and 'L' brackets (picture 14)
- 16 Run plate light connector through bottom body panel and plug into OEM connector (picture 15)
- 17 Turn key on and test blinkers and plate light
- 18 Put seat back on bike

