





NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

YAMAHA XSR

FENDER ELIMINATOR

- 1 Remove the stock seat
- 2 Remove four 8mm hex bolts (picture 1)
- 3 Disconnect 4 plugs (picture 2)
- 4 Remove four 10mm acorn nuts, and slide off stalk (picture 3)
- 5 Mount NRC license plate bracket to turn signal bracket with supplied M6 nuts/bolts (picture 4)
- 6 Slide four M5 bolts through plate and provided spacers to mount onto the bike with M5 nuts (picture 5/6)
- 7 Plug new connectors into stock harness
- 8 Mount license plate to NRC license plate bracket
- 9 With rubber cap, slide over seat lock (picture 7)
- 10 Put seat back onto the bike and ride safe

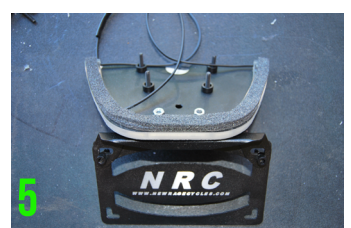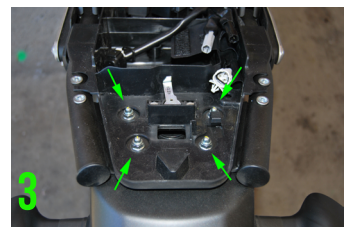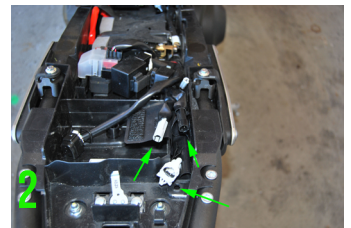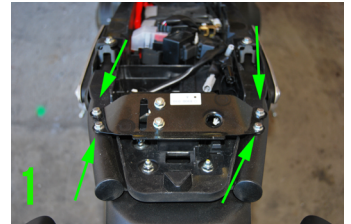

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR

If mounting 'Tucked' plate position...

- 1 Remove the stock seat
- 2 Remove four 8mm hex bolts (picture 1)
- 3 Disconnect 4 plugs (picture 2)
- 4 Remove four 10mm acorn nuts, and slide off stalk (picture 3)
- 5 Mount tucked plate bracket to turn signal bracket with supplied M5 bolts/nuts (picture 8)
- 6 Slide other two M5 bolts through plate and provided spacers to mount onto the bike with M5 nuts (picture 5/6)
- 7 Plug new connectors into stock harness
- 8 Mount license plate to tucked plate bracket
- 9 With rubber cap, slide over seat lock (picture 7)
- 10 Put seat back onto the bike and ride safe

