

NEW RAGE CYCLES




INSTALLATION INSTRUCTIONS

KAWASAKI ZX10R

FENDER ELIMINATOR/TAIL TIDY

Rear Turn Signal Installation Only

- 1 Loosen stock fender holding stock signals and license plate
- 2 Remove top plastic seat fairing
- 3 Remove ECU plastic shield and unplug connector (Picture 1)
- 4 Unplug turn signal and plate light connectors, and fully remove stock fender (picture 2)
- 5 Mount NRC turn signal bracket onto bike with provided spacers and M6 bolts (Picture 3)
- 6 Mount wire cover plate to bike with provided M6x10 bolts (Picture 4)
- 7 • Make your connections:
 - o LH Turn Signal (Black connector)
 - Green → Red on NRC wire
 - Yellow/Black → Black on NRC wire
 - o RH Turn Signal (Grey Connector)
 - Green → Red on NRC wire
 - Yellow/Black → Black on NRC wire
 - o Plate Light (2nd Black Connector)
 - Red/Blue → Red on NRC wire
 - Black/Yellow → Black on NRC wire
- 8 Reinstall ECU cover, seat fairing, and seats

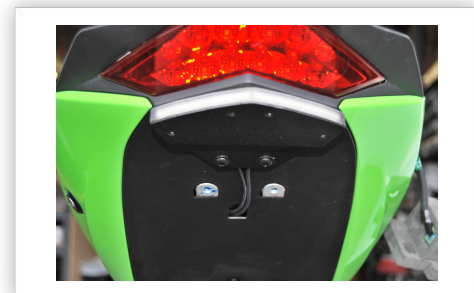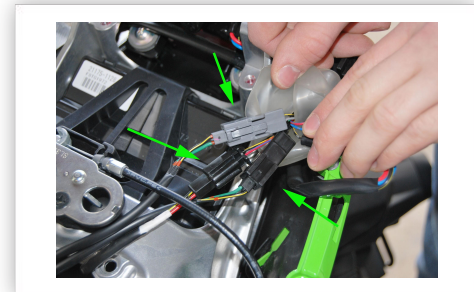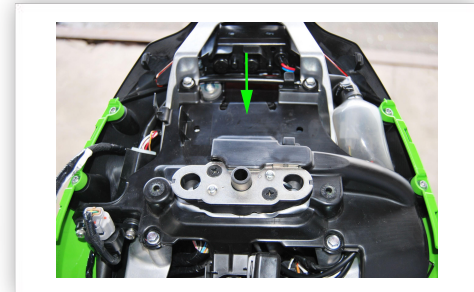

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR/TAIL TIDY

If installing complete fender eliminator (Tucked Plate Location)

- 1 Loosen stock fender holding stock signals and license plate
- 2 Remove top plastic seat fairing
- 3 Remove ECU plastic shield and unplug connector (Picture 1)
- 4 Unplug turn signal and plate light connectors, and fully remove stock fender (Picture 2)
- 5 Mount NRC turn signal bracket / license plate bracket onto bike with provided spacers and M6 bolts (Picture 5)
- 6 Make your connections with supplied wiring diagram
- 7 Reinstall ECU cover, seat fairing, and seats

