




NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

KAWASAKI ZX-6R

FENDER ELIMINATOR 2019-PRESENT

- 1 Remove seat from bike.
- 2 Remove (2) 10mm bolts and move set valve solenoid to the side. (Picture 1)
- 3 Unplug OEM connectors for turn signals and plate light.
- 4 Remove (4) allen bolts with a 5mm allen key or socket, and (2) philips head screws. You will not be reusing the philips head screws. Slide stock tail section off the bike. (Picture 2)
- 5 If installing the standard license plate, remove top plate from fender eliminator and mount license plate to lens bracket using M6 hardware. Screw the top bracket back on. (Pictures 3 and 4)
- 6 If installing the tucked license plate, mount to lens bracket using supplied M6 hardware. (Pictures 5 and 6)

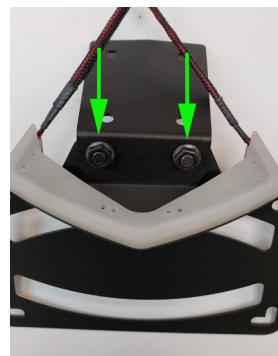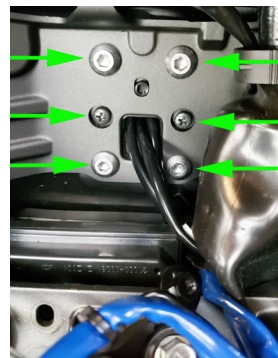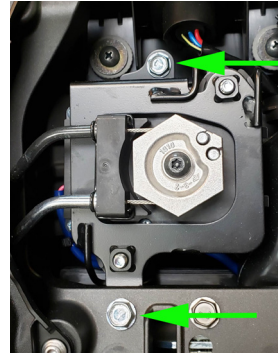

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR 2019-PRESENT

- 7 Using supplied bolts, spacers, and push nuts, prep fender eliminator for installation. Picture shown is the standard plate. Photo 5 and 6 already has you ready to install with the tucked plate. (Picture 7)
- 8 Route wires through stock hole, line up bolts to 4 holes, and use supplied M6 nuts to thread on. (Picture 8)
- 9 Plug connectors in and test everything.
- 10 Reinstall set valve solenoid.

