




Fitting Instructions for OCG0017BK Oil Cooler Guard
BENELLI 1130 CAFÉ RACER '05-



In This Kit There Should Be
1x Oil Cooler Guard (OCG0017)
2x 4mm Cable ties
1x 100mm Length of self-adhesive foam

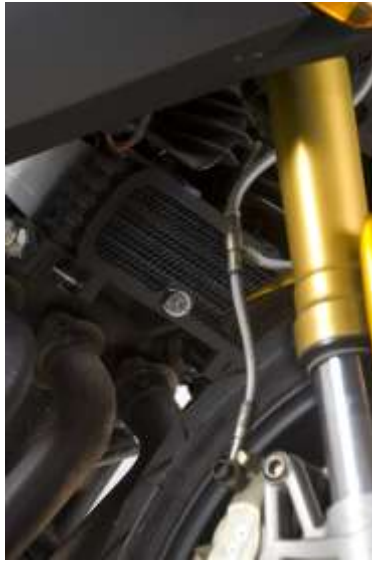

PICTURE 1



PICTURE 2

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



PICTURE 3

- To fit the oil cooler guard to the bike cut the foam strip provided into 10mm wide pieces and stick them to the back of the oil cooler guard frame, so that they sit between the oil cooler guard and the radiator.
- Remove the two bolts that secure the original oil cooler guard in place, as arrowed in picture 1.
- Offer the R&G oil cooler guard (OCG0017BK) into place on the oil cooler radiator and re-fit the two original bolts through the oil cooler guard and into the oil cooler mount, as shown in picture 2.
- Fit 1x cable tie through the top mount on the oil cooler guard and loop around the frame member before tightening, as shown in picture 3.
- Repeat this process for the remaining top mount.
- Ensure all bolts are tightened evenly and the oil cooler guard is mounted securely.

ISSUE 1 21/11/2012 (AR)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.


R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Instructions de montage pour OCG0017BK Protection refroidisseur d'huile
BENELLI 1130 CAFÉ RACER '05-

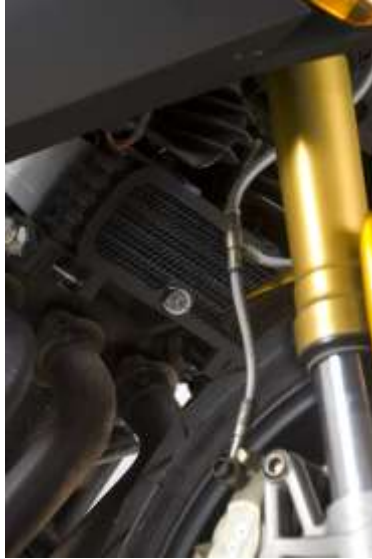

Ce kit doit contenir:

- 1x Protection refroidisseur d'huile (OCG0017)**
- 2x 4mm Attaches câble**
- 1x 100mm Longueurs de mousse autocollante**

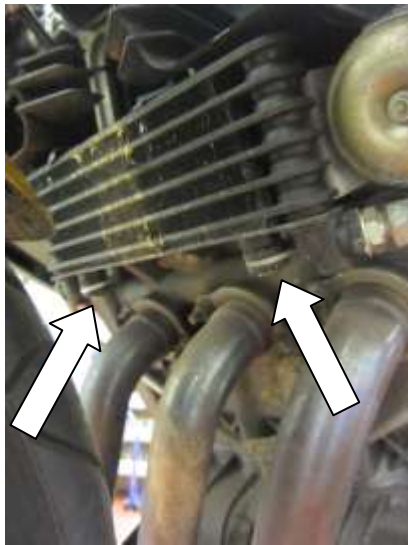


PHOTO 1



PHOTO 2



PHOTO 3

- Pour installer la protection refroidisseur d'huile sur la moto, couper la mousse en bandeaux de 10mm puis collez ces bandeaux au bas du support de refroidisseur d'huile, de façon à ce que ces bandeaux se mettent entre la protection refroidisseur d'huile et le radiateur.
- Enlever les 2 boulons qui fixent la protection refroidisseur d'huile en place (Photo 1).
- Poser la protection refroidisseur d'huile (OCG0017BK) en place sur le radiateur refroidisseur d'huile puis remettre les 2 boulons d'origine à travers la protection refroidisseur d'huile et dans le support refroidisseur d'huile (Photo 2).
- Passer un attaché câble à travers le support supérieur sur la protection refroidisseur d'huile et bouclez le autour de l'élément de châssis avant de serrer, (Photo 3).
- Répéter ce processus pour le support restant.
- Assurez vous que tous les boulons soient serrés de façon égale et que la protection refroidisseur d'huile soit bien fixée, en toute sécurité.

ISSUE 1 21/11/2012 (AR)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.


R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Montageanleitung für den OCG0017BK Ölkühlerschutz
BENELLI 1130 CAFÉ RACER '05-

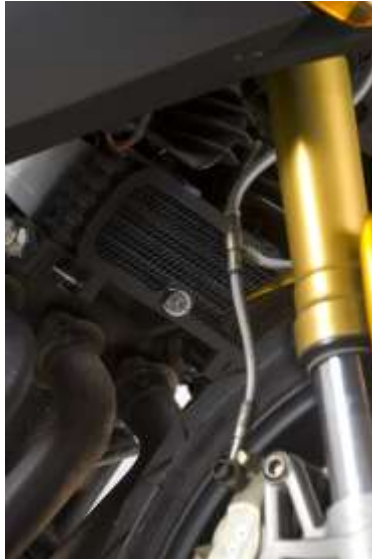

Dieser Kit enthält:

1x Ölkühlerschutz (OCG0017)

2x Kabelbinder

1x 100mm selbstklebender Schaumstoffstreifen



ABBILDUNG 1



ABBILDUNG 2



ABBILDUNG 3

- Um den Ölkühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoffstreifen in 10 mm breiten Streifen und kleben Sie diese auf der Rückseite des Ölkühlerschutzes, so dass sie zwischen dem Ölkühlerschutz und dem Ölkühler angebracht sind.
- Entfernen Sie die zwei Schrauben, die den Originalkühlerschutz befestigen – siehe Abbildung 1.
- Den R&G Ölkühlerschutz (OCG0017BK) am Ölkühler ansetzen und mit den zwei Originalschrauben befestigen. Die Schrauben werden durch den Ölkühlerschutz in die Ölkühlerhalterung, wie in Abbildung 2 abgebildet, verschraubt.
- Stecken Sie einen Kabelbinder durch die obere Halterung am Ölkühler, dann wickeln Sie ihn um den Längsträger - siehe Abbildung 3 – anschließend festziehen.
- Wiederholen Sie diesen Schritt für die verbleibende Halterung oben.
- Überprüfen Sie, dass alle Schrauben gleichmäßig festgezogen sind, und dass der Ölkühlerschutz ordnungsgemäß angebracht ist.

AUSGABE 1 21/11/2012 (AR)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com