

YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT

070BG117200
Suzuki GSX-8S

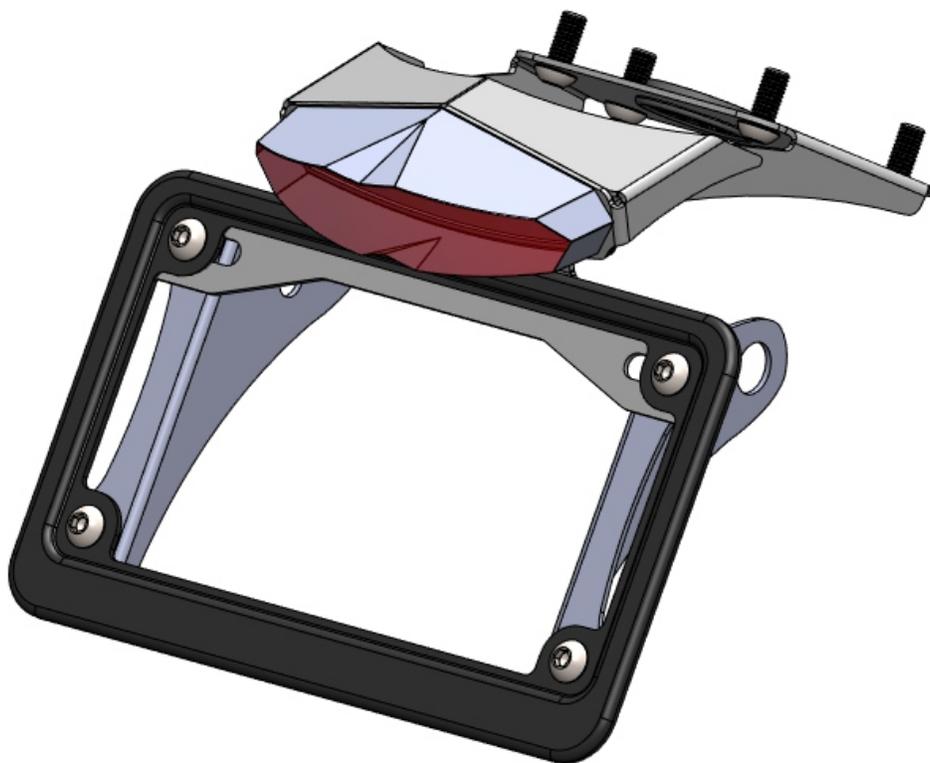


THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.




x1

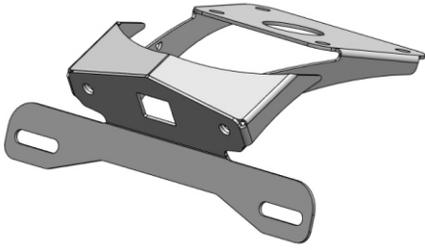

11720-FEBKT
Fender Eliminator Bracket

x1




HB025024-E
Tail Light

x1




070BG-LPF
License Plate Frame

x1



11720-TSBKT-L
Left Turn Signal Bracket

x1



11720-TSBKT-R
Right Turn Signal Bracket

x2



M6X16BHS
6mm x 16mm
Button Head Screw

x6



M6X14BHS
6mm x 14mm
Button Head Screw

x4



6MMWASHER
6mm Washer

x4




6MMLN
6mm Lock Nut

x1



H-2158
Wire Cover

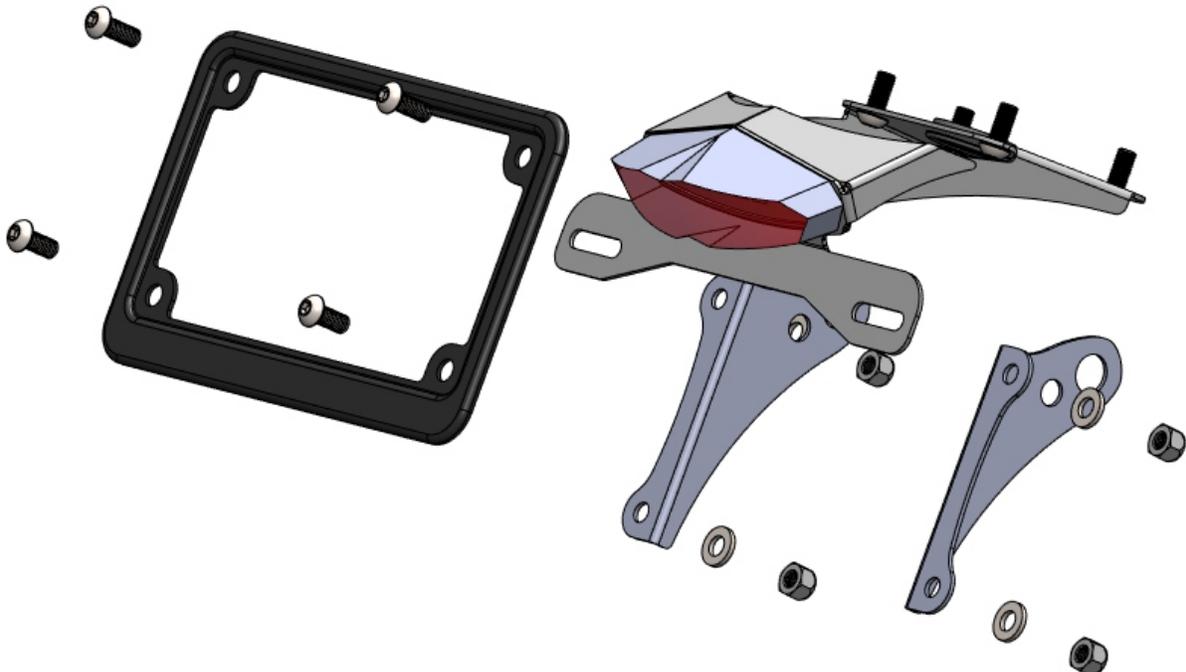


Removal


1. Remove passenger seat.
2. Locate and disconnect license plate light and turn signal connectors.
3. While securely supporting the stock fender assembly, remove the four bolts securing the fender assembly to the frame. Carefully remove the stock fender assembly making sure not to damage the connectors in the process.
4. Disassemble the stock fender assembly and remove the left and right turn signals.

Installation


1. Install *HB025024-E*, tail light to *11720-FEBKT*, fender bracket using the tail light washers and nuts.

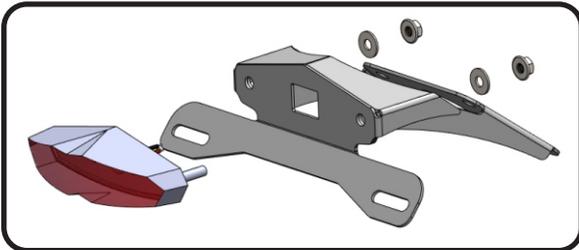

2. Install *H-2158*, wire cover into *11720-FEBKT*, fender bracket.

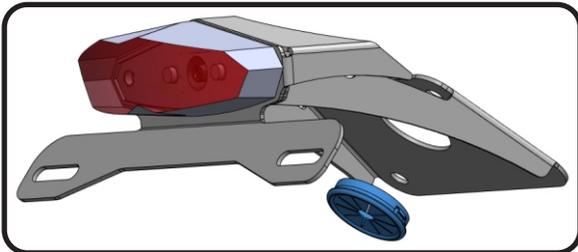

3. Install stock left and right turn signals onto *11720-TSBKT-L/R*, left and right turn signal brackets using the stock turn signal nut. Do not use OEM turn signal hat washer.
4. Assemble and install *070BG-LPF*, license plate frame and *11720-TSBKT-L/R*, turn signal brackets to *11720-FEBKT*, fender eliminator bracket using *M6X16BHS* & *M6X14BHS*, 6mm screws, *6MMWASHER*, 6mm washers and *6MMLN*, 6mm nylon lock nuts as shown.

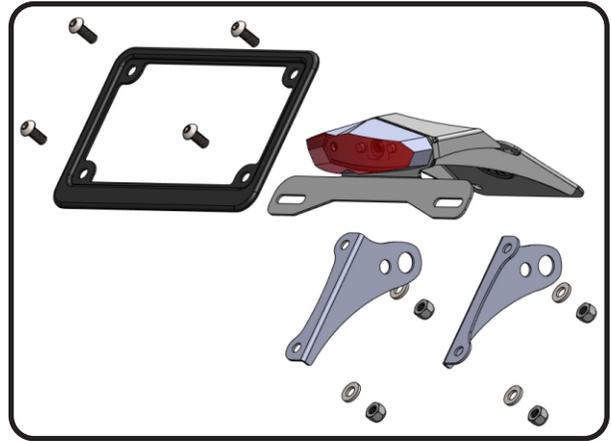

5. Install assembled fender eliminator by routing license plate light and turn signal wires through *H-2158*, wire cover on fender eliminator bracket and through undertail. Secure fender bracket to frame using the four stock fender bolts. Torque bolts to factory specification.
6. Route wires in stock location and re-connect license plate light and turn signal connectors.
7. Re-install passenger seat.
8. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.