



<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

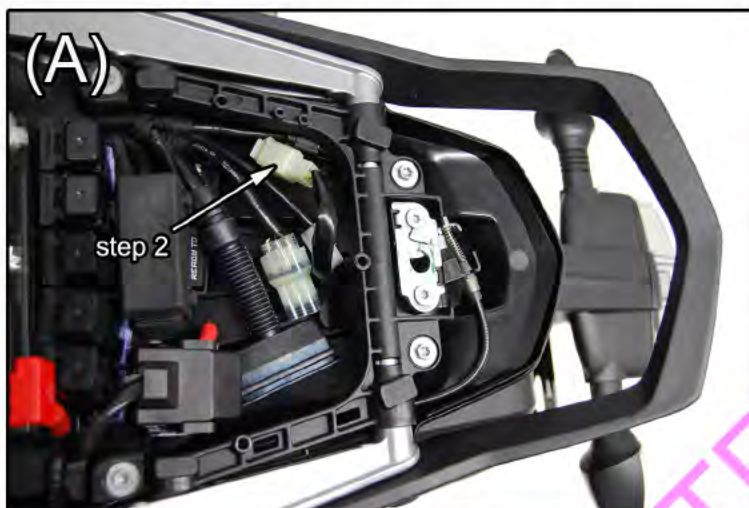

REMOVAL:

- 1) Remove rear seat (use key).
- 2) Unplug rear fender wiring harness *FIG (A).
- 3) Remove rear fender (4- T30 bolts). *FIG (B)
- 4) Pull wire and plug through undertail.
- 5) Remove splash guard from underside of rear fender. (2- T30 bolts, and 2- T20 screws) *FIG (C)
- 6) Remove license plate bracket from rear fender. (4- T25 bolts) *FIG (D)
- 7) Split rear fender (3- T30 bolts). *FIG (E)
- 8) Remove turn signals & taillight (with rubber mounts).
- 9) Unplug lights from wire pigtail and remove grommet.
- 10) Insert large stock grommet into hole of undertail.

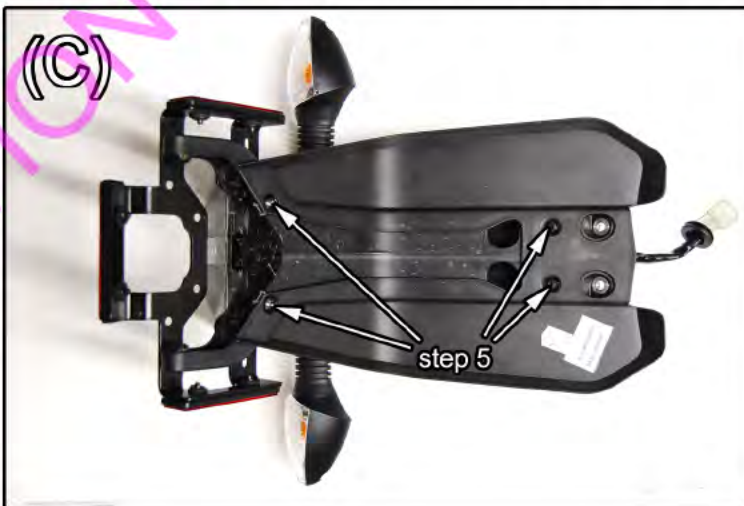

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>



PARTS LIST:

- 1- Main Assembly (with grommets)
- 1- Taillight Surround
- 2- Signal Brackets
- 4- 6x16 Allen Bolts
- 2- 6x12 Allen Bolts
- 2- 6x10 Allen Bolts
- 4- 6mm Nuts
- 4- 6mm Washers

INSTALLATION:

- 1) Secure your license plate to lower two holes of Main Assembly. (use 2- 6x10 allen bolts) *FIG (F)
- 2) Mount your turn signals to Signal Brackets and secure them to Main Assembly (2- 6x12 allen bolts). *NOTE* route wires through grommets.
- 3) Install lower rubber taillight mounts to Main Assembly.
- 4) Position taillight onto Main Assembly and encapsulate taillight with Taillight Surround. Study FIG's (F)&(G).
- 5) With everything aligned, attach entire assembly to undertail (use 4- 6x16 allen bolts). Carefully route all wires through large stock grommet into storage.
- 6) Using stock wire pigtail connect all wires (see chart).
- 7) Check lighting for proper function.
- 8) Replace rear seat.



COLOR CHART:

- Red Band= Left Turn Signal
- Green Band= Right Turn Signal