



## MOUNTING SUGGESTIONS:

### Indian Chieftain, Chief Vintage & Chief Classic 2014-18

Wide Touring Solo with Driver Backrest &  
Passenger Seat with Passenger Backrest

**Hardware included:** Amplifier relocation bracket  
Plastic spacer  
White nylon washer  
1/4"-20 x 5/8" screws x2

**Tools needed:** 5 mm Allen wrench  
6 mm Allen wrench  
Phillips screwdriver

#### Removal of Stock Seat:

1. Remove the 8mm screw from the rear bracket using a 5mm Allen wrench. (Fig. 1)
2. Remove the right and left side covers by pulling straight back, releasing the studs from the rubber grommets (There are three grommets holding each cover). (Fig. 2)
3. Using a 6mm Allen wrench, remove the screws from the side brackets on both the right and left side of the seat. (Fig. 3)
4. Lift the rear of the seat and pull away from the tank to remove the stock seat.



Fig. 1



Fig. 2



Fig. 3

## Installation of Mustang Seat:

5. To relocate the amplifier if necessary, remove the two T-25 Torx from the stock mounting bracket and mount the amplifier to the supplied bracket. Remove the two M6 bolts holding the mounting bracket to the bike. Using one of these M6 bolts, mount the bracket with the amplifier through the plastic spacer and into the hole on the left side of the frame.

6. Attach the Mustang passenger seat to the driver seat before installing it on the bike using the two supplied  $1/4" \times 5/8"-20$  screws. Line up the holes in the passenger seat brackets with the two locations on the driver seat and tighten them with a Phillips screwdriver. (Fig. 4 & Fig. 5)

7. Install your Mustang seat by lowering the front of the seat first, then slide the seat forward until the front bracket engages under the two tabs on the bike frame. (Fig. 6) Push forward until snug, then lower the rear of the seat.

8. Reinsert the two 8mm Allen bolts on both right and left side brackets of the seat. Tighten with a 6mm Allen wrench. (Fig. 7)



Fig. 4



Fig. 5



Fig. 6



Fig. 7

## Installation of Mustang Seat: (cont.)

9. Use the supplied white nylon washer and put it in place underneath the bracket on the seat. Then reinstall the 8mm screw through both bracket and washer, tightening with a 5mm Allen wrench. (Fig. 8)



Fig. 8

10. Reinstall the right side cover by lining up the studs on the cover with the rubber grommets on the bike, and push in place.



Fig. 9

11. To install the left side cover, it is easier to open the saddle bag lid first. Then line up the cover and push into place. (Fig. 9)

12. If you purchased a seat with an adjustable driver backrest, just pull back the leather flap and insert it into the receiver. You will feel it engage at multiple heights. (Fig. 10)



Fig. 10

13. The driver backrest can be taken out and used for as a passenger backrest as well if passenger seats 79761 or 79763 are used. Just pull back the leather flap and insert into the receiver. Then make sure to tighten the passenger backrest in place by turning the thumb screw until snug. (Fig. 11)

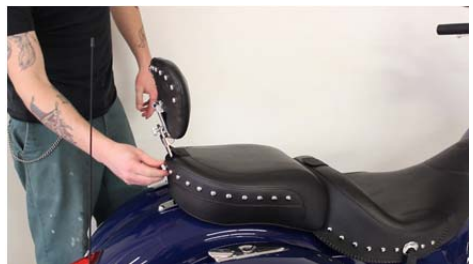


Fig. 11

Enjoy the comfort and custom look of your new Mustang seat!



These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to [questions@mustangseats.com](mailto:questions@mustangseats.com) or visit our website at [www.mustangseats.com](http://www.mustangseats.com).

For care and maintenance of our seats, please go to our website under "Support".

Refers to part numbers: 75360, 75361, 75362, 75363, 79760, 79761, 79762, 79763

**You are cordially invited to  
— Tour the Mustang Factory —**

See how our craftspeople take pride in transforming raw materials into the world's highest quality, most comfortable handcrafted seats. Please contact Mustang for more information regarding tours of our historic Three Rivers, Massachusetts, facility (only 75 miles west of Boston; 150 miles northeast of New York City). Our two hour tours are by reservation only; we can accommodate groups from 2 to 24. We promise you will ride away with an entirely new awareness of what you put between you and your bike.