




ECC0175

FITTING INSTRUCTIONS FOR ECC0175 RHS ENGINE CASE COVER
SUZUKI V-STROM 1000 (DL 1000) 2014-

Page | 1

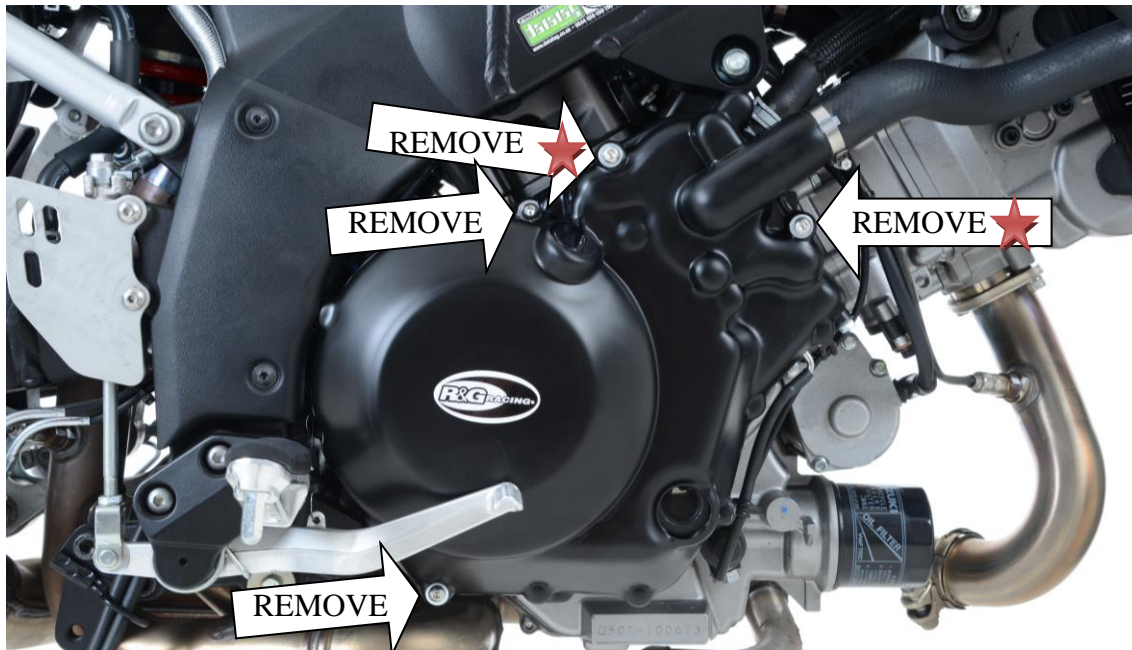

In this kit there should be:

- 1 x Engine Case Cover (PC0175).
- 2 x M6 x 40mm long button head bolts (rear).
- 2 x M6 x 75mm long button head bolt (★front).

PLEASE READ THESE INSTRUCTIONS FULLY BEFORE STARTING



- Please make sure the engine is cold before proceeding with the fitting of the R&G cover.
- Remove the two master cylinder mounting bolts pictured above left.
- Disconnect the brake lever spring pictured above right (there is no need to remove completely).
- Remove the four engine case bolts arrowed above. Hold the cover loosely over the case to help identify the correct ones. **DO NOT REMOVE ALL OF THE CASE BOLTS.**
- Remove the oil filler cap.
- Offer up the R&G cover to the engine and carefully fit it over the engine casing (you will have to move the brake pedal out of the way). Ensure that the four R&G bolts are lined up with the holes in the engine casing, and then push on as far as it will go.



ECC0175

- Fit the bolts through the Engine Case Cover and into the engine case (please note the longer bolt positions are labelled with a star).
- With a 5mm Allen key tighten the bolts equally so that they pull the cover into place. DO NOT FULLY TIGHTEN.
- Finally use a torque wrench set at **10 Nm (7 Lb ft)** to fully tighten.
- Refit the oil filler cap.
- Refit the master cylinder bolts and heel guard as original.
- Reconnect the brake lever spring as original.
- **Please check the operation of the brake lever before riding.**
- It is suggested that you check the tightness of the mounting bolts on a regular basis i.e. when cleaning or once a month.
- NOTE for the cleaning of this product you should only use a soft polishing cloth and a mild general cleaning agent.
- AVOID HARMFUL CHEMICALS. IF IN DOUBT DO NOT USE AS THEY COULD ALTER THE STRENGTH OF THE COVER.
- R&G will accept no liability if the above procedure and torque settings are not followed.

Page | 2

Digital copies of these instructions are available to download from www.rg-racing.com

GENERAL TORQUE SETTINGS

M4 BOLT = 8Nm
M5 BOLT = 12Nm
M6 BOLT = 15Nm
M8 BOLT = 20Nm
M10 BOLT = 40Nm

ISSUE 2 21/11/2022 NEW SPACER UPDATE

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)


Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



ECC0175

Instructions de montage pour ECC0175 Protection carter moteur droit
SUZUKI V-STROM 1000 (DL 1000) 2014-

Page | 3

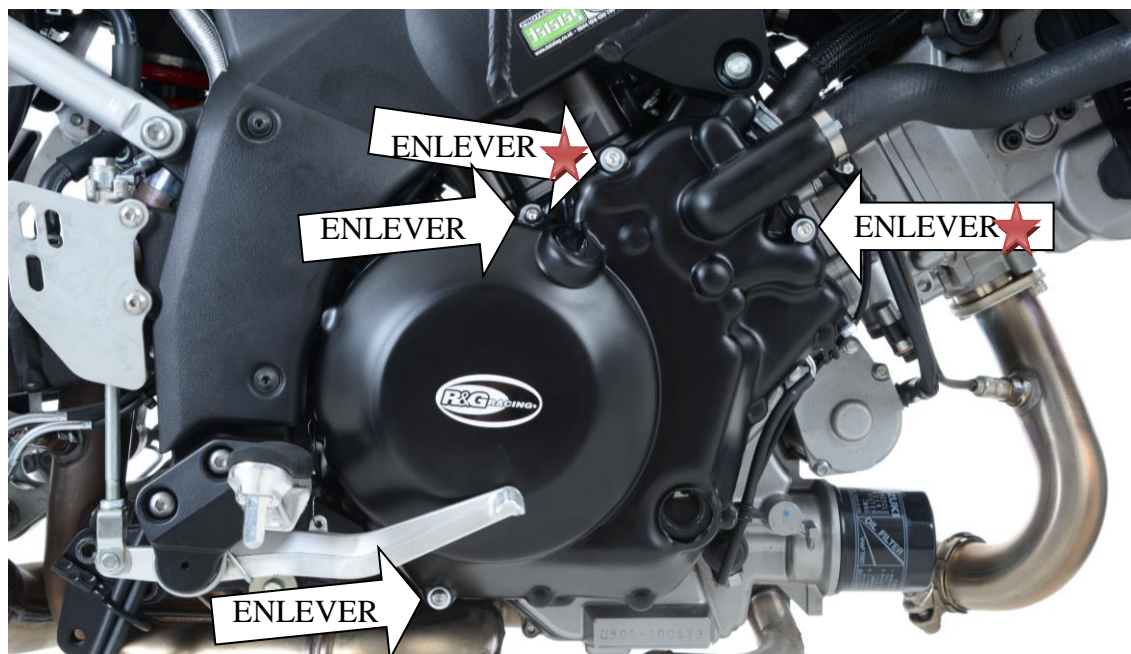

Le kit doit contenir :

1 x Protection carter moteur (PC0175).

2 x M6 x 40mm Boulons (arrière).

2 x M6 x 75mm Boulons (avant). ★

Bien lire ces instructions avant de procéder au montage:



- Assurez-vous que le moteur soit froid.
- Enlever les 2 boulons de fixation du maître cylindre, indiqués en haut à gauche.
- Déconnecter le ressort de levier de frein indiqué au dessus à droite (pas besoin de l'enlever complètement).
- Enlever les 4 boulons de carter moteur fléchés ci dessus. Tenir le couvercle autour du carter pour aider à identifier les bons trous. **NE PAS ENLEVER TOUS LES BOULONS DE CARTER.**
- Enlever le capuchon de remplisseur d'huile.
- Mettre la protection R&G en place en faisant bien attention (Vous devrez déplacer la pédale). S'assurer que les 4 boulons R&G soient alignés avec les trous, puis, une fois cela vérifié, pousser la protection jusqu'à la limite

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



ECC0175

- Passer les boulons dans la protection carter moteur puis dans le carter moteur (Notez que la position du boulon le plus long est indiquée par une étoile).
- Serrer les boulons avec une clé Allen de 5mm, pour qu'ils placent la protection en place. NE PAS SERRER COMPLETEMENT.
- Utiliser une clé dynamométrique à 10 Nm (7 Lb ft) pour bloquer).
- Remettre le capuchon de remplisseur d'huile.
- Remettre les boulons de maître cylindre et le garde talon comme à l'origine.
- Reconnecter le ressort de levier de freins comme à l'origine.
- Nous vous suggérons de vérifier le serrage au moins une fois par mois, lors du nettoyage par exemple.
- NOTE: Pour le nettoyage, vous devriez utiliser uniquement un chiffon doux et un agent nettoyant doux.
- Ne pas utiliser d'agents chimiques qui pourraient altérer l'efficacité de la protection.
- R&G n'acceptera aucune responsabilité en cas de mauvais couple de serrage ou d'utilisation inappropriée d'agents nocifs.

Page | 4

Ces instructions de montage sont disponibles au téléchargement sur www.rg-racing.com

COUPLES DE SERRAGE RECOMMANDES

M4 Boulon = 8Nm
M5 Boulon = 12Nm
M6 Boulon = 15Nm
M8 Boulon = 20Nm
M10 Boulon = 40Nm

ISSUE 2 21/11/2022 NEW SPACER UPDATE